



TIP-ON BLUMOTION for LEGRABOX and MOVENTO

UK Stock Programme


www.blum.com

 **blum**[®]

Innovative technology

TIP-ON BLUMOTION for LEGRABOX and MOVENTO combines the advantages of the TIP-ON mechanical opening support system with reliable BLUMOTION dampening for silent and effortless closing – 100% mechanically.

 **blum**

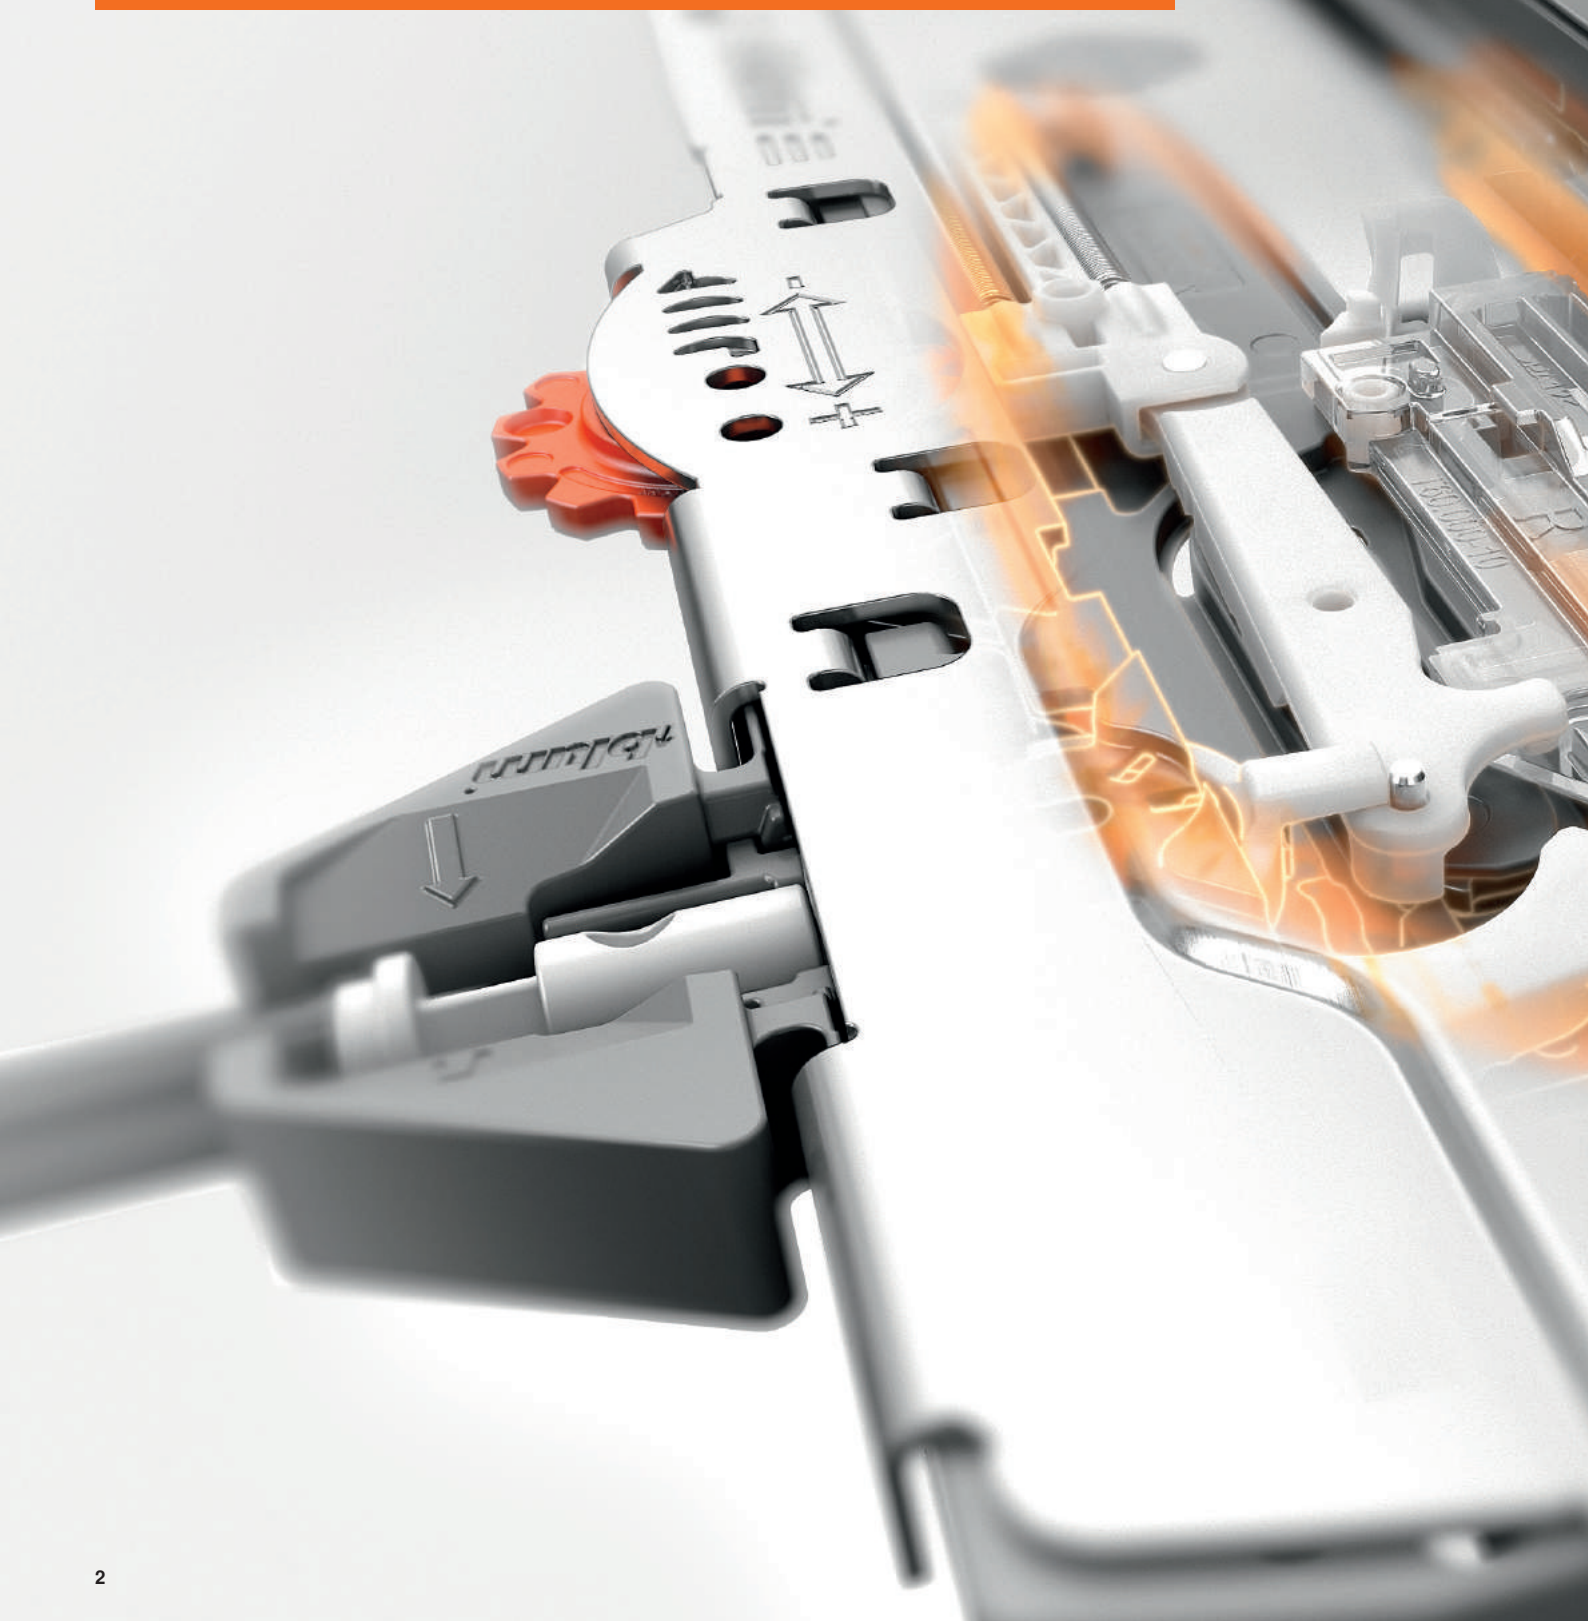



Contents

- 4 High functionality
- 6 Easy assembly
- 8 Clear programme
- 10 Well-designed product details
- 12 Technical overview – LEGRABOX
- 20 Technical overview – MOVENTO



Experience TIP-ON BLUMOTION interactively now:

Just download the free "Blum Magazines" app for tablet PCs in the App Store or from Google Play and experience TIP-ON BLUMOTION digitally!



➤ Watch TIP-ON
BLUMOTION film:
[www.blum.com/
trailertiponblumotion](http://www.blum.com/trailertiponblumotion)

High functionality

Opens with just a light touch, has a smooth running action and closes silently and effortlessly – experience completely harmonious and convenient motion with TIP-ON BLUMOTION technology for LEGRABOX and MOVENTO. And the best part: the motion is assisted 100 % mechanically.

 **blum**



Small front gap

TIP-ON BLUMOTION can be adjusted to have a small front gap of 2.5 mm, meaning it is also ideal for kitchens.




Four-dimensional adjustment

The four-dimensional adjustment ensures a precise gap layout. The integrated depth adjustment can be made tool-free using the adjustment wheel.



Reliable function

It is possible to pull to open or push to close without difficulty, and TIP-ON BLUMOTION will remain fully functional.

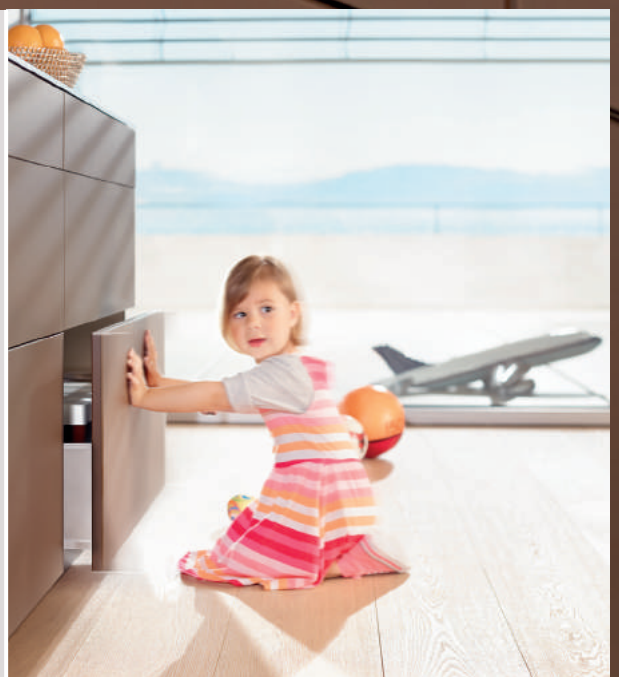


Easy assembly

TIP-ON BLUMOTION for LEGRABOX and MOVENTO is the perfect mechanical solution for handle-less furniture in all living areas. Pull-outs and drawers can be implemented in the usual manner. Practical templates from Blum can be used to make installation and assembly easier.



➤ Watch assembly film:
[www.blum.com/
assemblytiponblumotion](http://www.blum.com/assemblytiponblumotion)

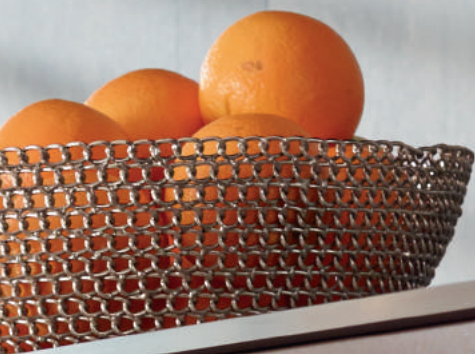

No additional cabinet and drawer assembly

TIP-ON BLUMOTION can be used with standard cabinets and fronts. There is no need for additional assembly, e.g. for recessed grips or handle strips.



Familiar drilling positions

The usual LEGRABOX and MOVENTO drilling positions can be used for TIP-ON BLUMOTION too.



Simple, tool-free assembly

The TIP-ON BLUMOTION unit can be assembled tool-free, as can all the other components.



Precise front gap adjustment

The adjustment template can be used to precisely and conveniently adjust the front gap to 2.5 mm for LEGRABOX and MOVENTO.

Clear programme

The basis of TIP-ON BLUMOTION is the specially designed LEGRABOX cabinet profile or MOVENTO runner. All other product components are compatible with both pull-out systems. The large number of standard parts form a compact programme that opens up a wide range of possibilities when designing handle-less furniture.


blum



➤ Fittings selection made easy with the online product configurator at www.blum.com/configurator

TIP-ON BLUMOTION components

1. TIP-ON BLUMOTION LEGRABOX cabinet profile
2. TIP-ON BLUMOTION MOVENTO runner
3. TIP-ON BLUMOTION unit
4. TIP-ON BLUMOTION latch
5. TIP-ON BLUMOTION synchronisation adapter
6. TIP-ON BLUMOTION synchronisation linkage

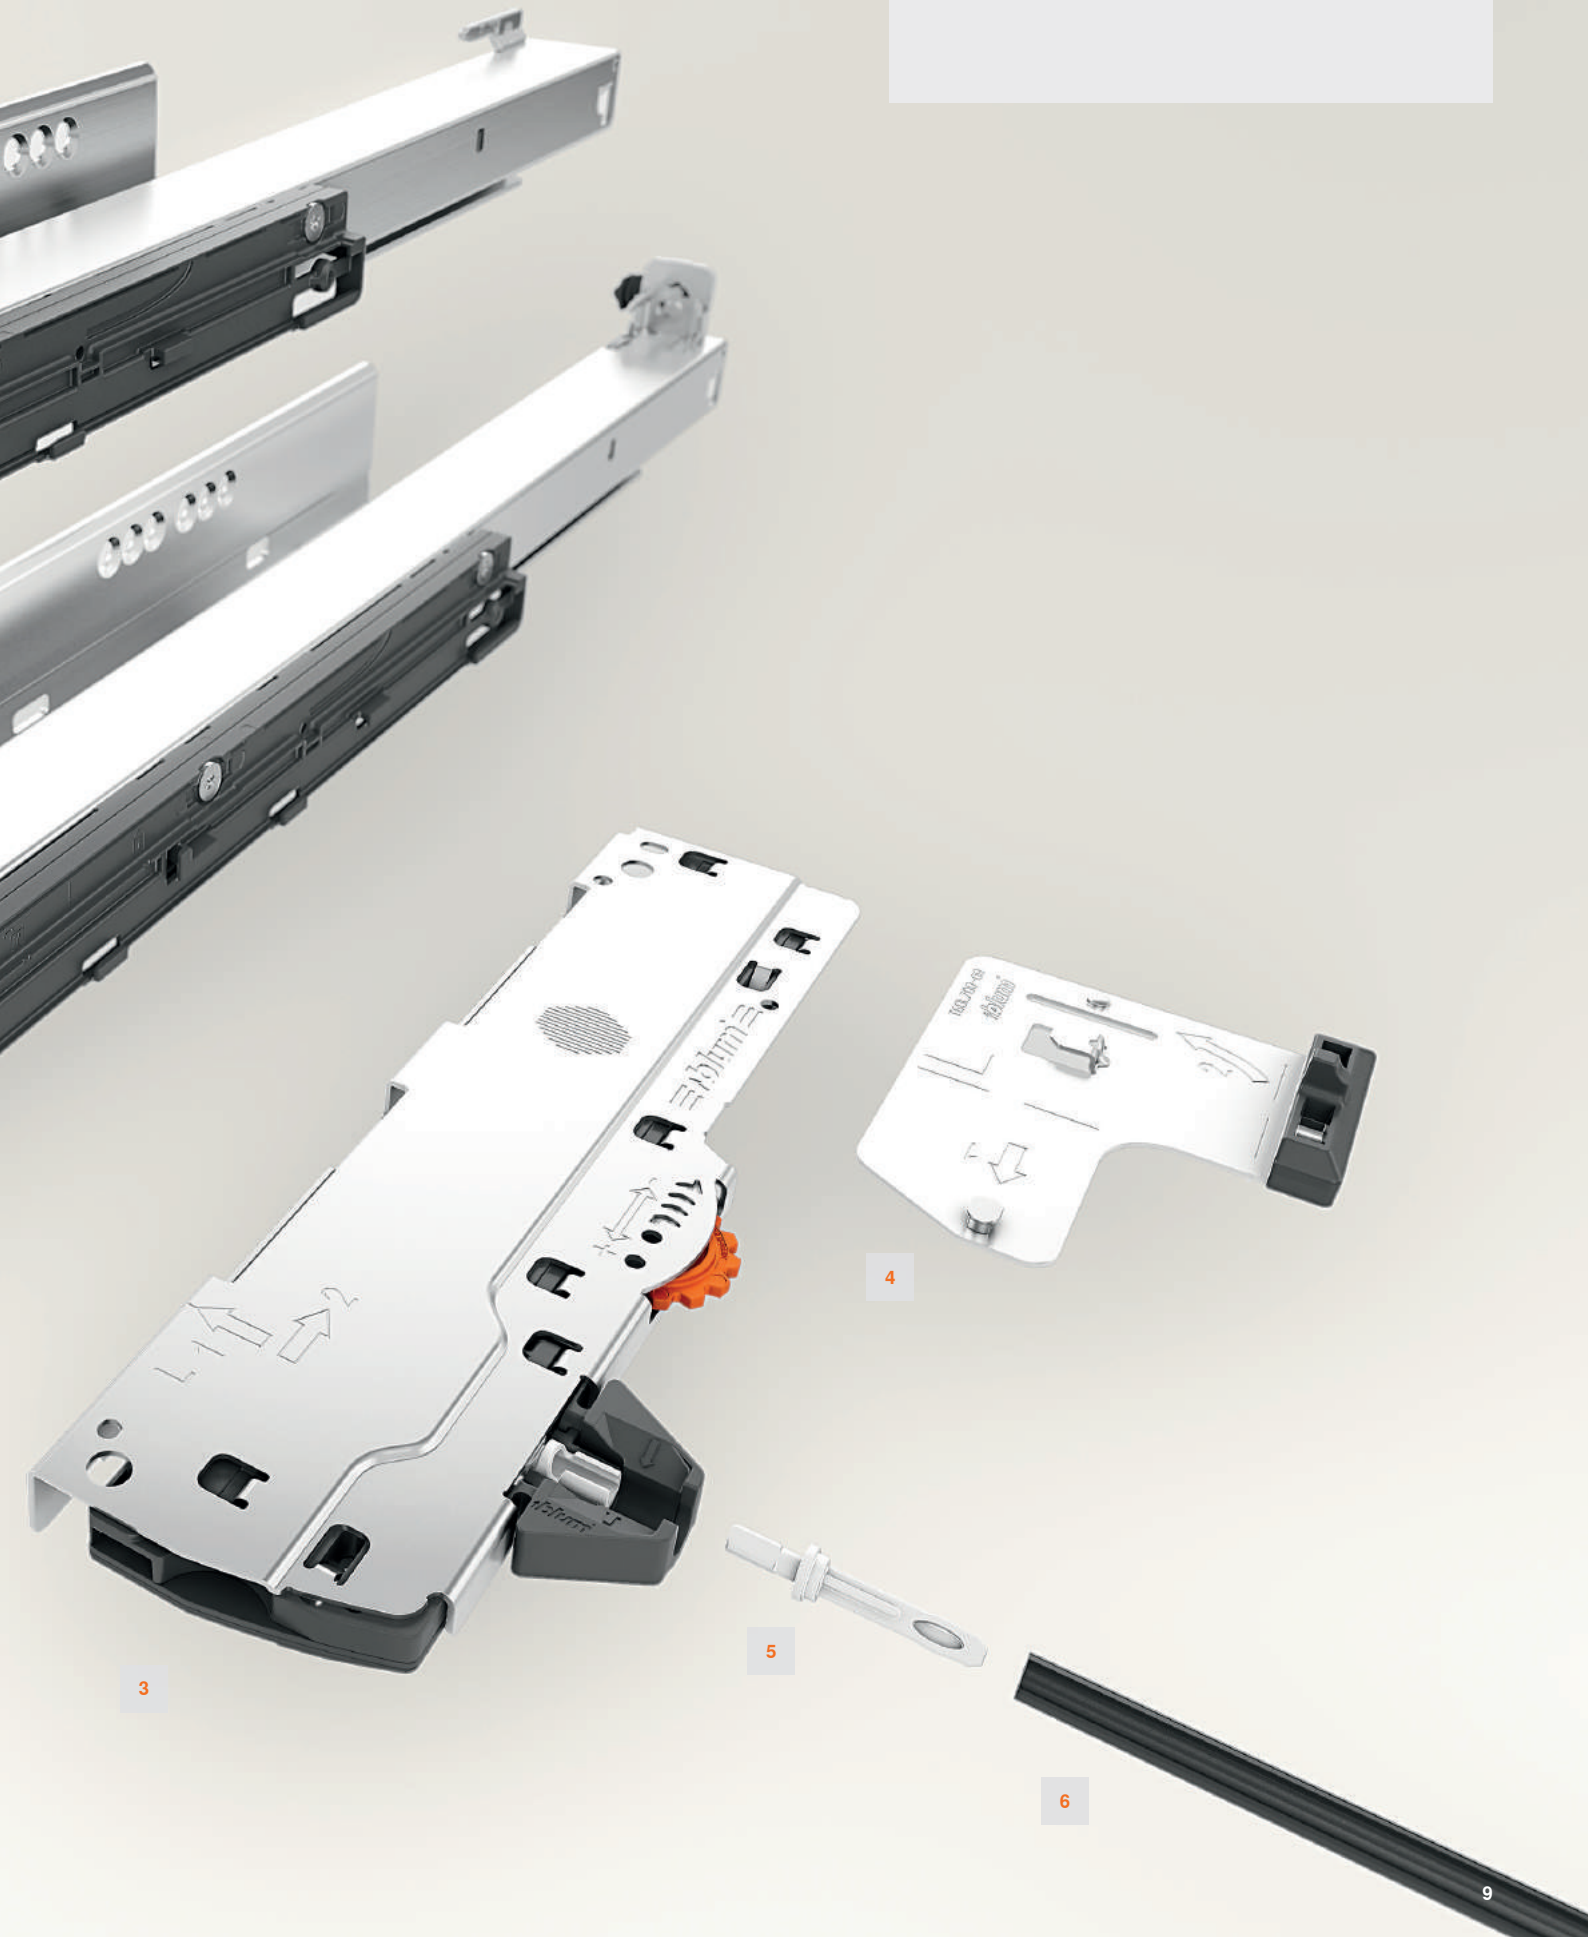

Well-designed product details

Many of the TIP-ON BLUMOTION components can be used for both LEGRABOX and MOVENTO. This means that TIP-ON BLUMOTION is a suitable solution for any application.



TIP-ON BLUMOTION for pull-out systems

It is possible to use a wide range of nominal lengths with the pull-out systems for LEGRABOX and MOVENTO. The pull-outs and drawers impress with their stability and load bearing capacity.

TIP-ON BLUMOTION LEGRABOX cabinet profile

40 and 70 kg
Nominal length (NL) 270 to 650 mm




TIP-ON BLUMOTION MOVENTO runner

40 and 60 kg
Nominal length (NL) 270 to 750 mm



TIP-ON BLUMOTION units and TIP-ON BLUMOTION latch

Adjusted for weight ranges and nominal lengths, the TIP-ON BLUMOTION unit is available in designs of varying strengths. For easy differentiation, each version is a different colour. The latch can be universally used for all TIP-ON BLUMOTION units.

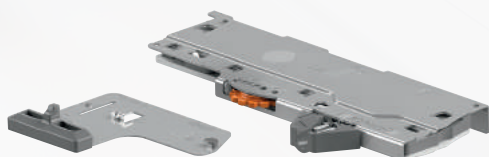


S0

< 10 kg

NL 270–300 mm (LEGRABOX) or 320 mm (MOVENTO)

White

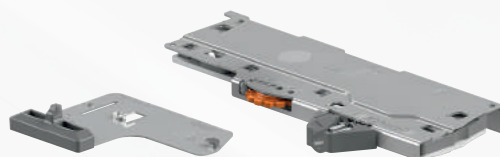


S1

10–20 kg

NL 270–300 mm (LEGRABOX) or 320 mm (MOVENTO)

Light grey

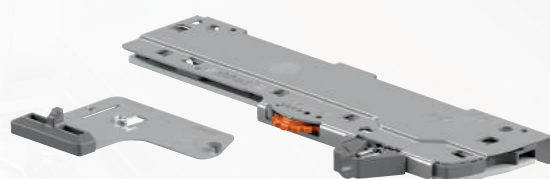

L1

0–20 kg

NL 350–650 mm (LEGRABOX) or 750 mm (MOVENTO)

Light grey




L3

5–40 kg

NL 350–650 mm (LEGRABOX) or 750 mm (MOVENTO)

Dust grey

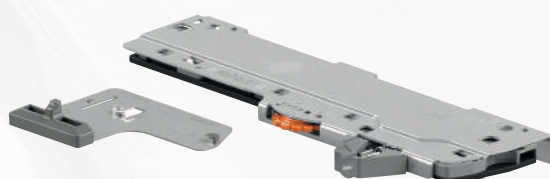

L5


25–70 kg

NL 350–650 mm (LEGRABOX) or 750 mm (MOVENTO)

Black

TIP-ON BLUMOTION synchronisation

An extensive trigger range is achieved even with a low minimum front gap of 2.5 mm.

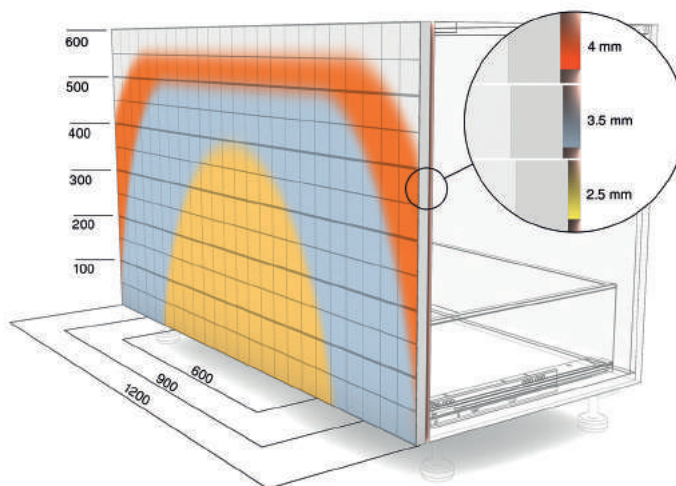

Shown in the diagram by way of example for height C, nominal length 500 mm with front stabiliser





TIP-ON BLUMOTION for LEGRABOX – technical overview


 **blum**

Order specification

TIP-ON BLUMOTION for LEGRABOX

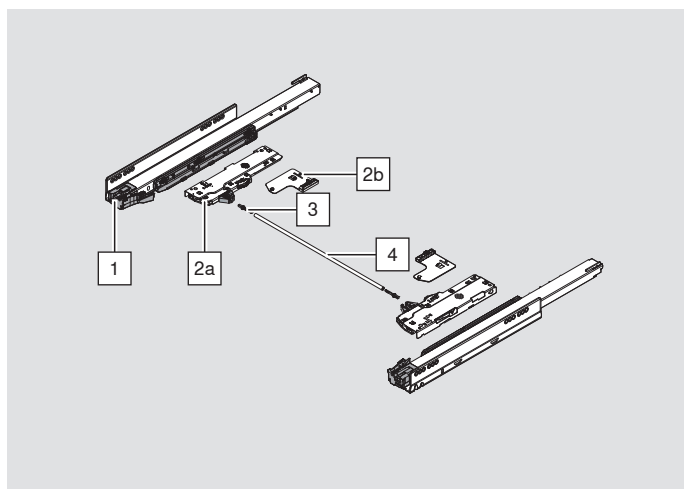

1	TIP-ON BLUMOTION cabinet profile LEGRABOX left/right		
	Nominal length (NL)	40 kg	70 kg
	270 mm	750.2701M	
	300 mm		
	350 mm	750.3501M	
	400 mm	750.4001M	
	450 mm	750.4501M	753.4501M
	500 mm	750.5001M	753.5001M
	550 mm		753.5501M
	600 mm		
	650 mm		753.6501M

2a + 2b	Set containing TIP-ON BLUMOTION unit and TIP-ON BLUMOTION latch									
	Can be used for:			Recommended weight ranges* for an optimum opening and closing function						
	Nominal length (NL)	Unit	Part number	< 10 kg	20 kg	30 kg	40 kg	50 kg	60 kg	70 kg
	270–300 mm	S0	T60L7040	≤ 10						
		S1	T60L7140		> 10–20					
	350–650 mm	L1	T60L7340	≤ 20						
		L3	T60L7540		5–40					
		L5	T60L7570					25–70		

3a	TIP-ON BLUMOTION synchronisation adapter	
	Symmetrical, in combination with synchronisation linkage, two items required per synchronisation linkage, for internal cabinet width ≥ 294 mm	
		T60.000D

3b	TIP-ON BLUMOTION one-part synchronisation for cutting to size	
	Symmetrical, no synchronisation linkage required, for internal width of 245–293 mm	
		T60.300D

4	TIP-ON BLUMOTION round synchronisation linkage for cutting to size	
	For cabinets widths ≥ 400 mm, suitable for cabinet widths of up to 1400 mm	
		T60.1125W

Accessories


	TIP-ON BLUMOTION front gap template	
	Setting the front gap to 2.5 mm	
		65.5631

* Total weight of the pull-out

TIP-ON BLUMOTION for LEGRABOX



Planning

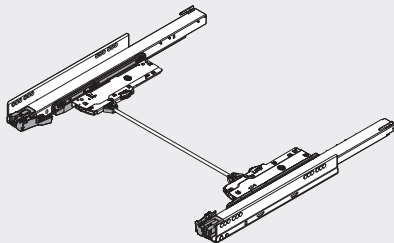


- TIP-ON BLUMOTION for LEGRABOX uses the same standard installation dimensions as for LEGRABOX. Please refer to the relevant product brochure or catalogue for this information
- The following planning graphics are shown as an example for a drawer with height M




➤ More information
on LEGRABOX:
[www.blum.com/
downloadslegrabox](http://www.blum.com/downloadslegrabox)

Front assembly – do not assemble bumpers




Bumpers should not be assembled for TIP-ON BLUMOTION!

Space requirements in the cabinet – drawer

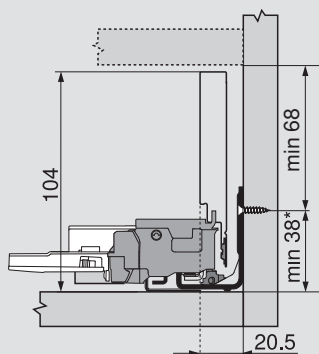

* + 1 mm for assembly of the cabinet profile on the horizontal cabinet side


Space requirements in the cabinet – inner drawer

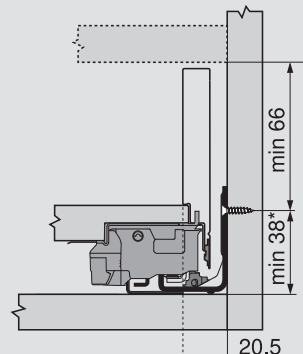

* + 1 mm for assembly of the cabinet profile on the horizontal cabinet side


Cabinet profile screw position – 40 kg

Nominal length NL (mm)

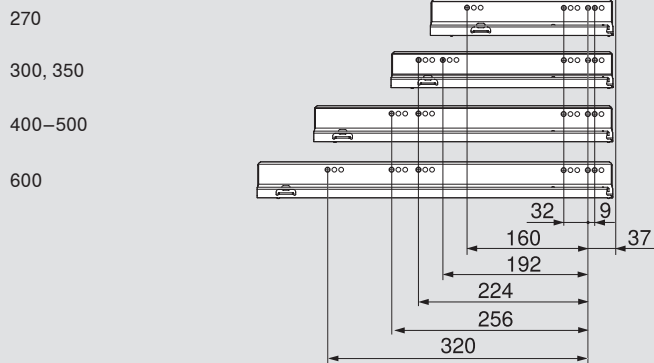


Cabinet profile screw position – 70 kg

Nominal length NL (mm)

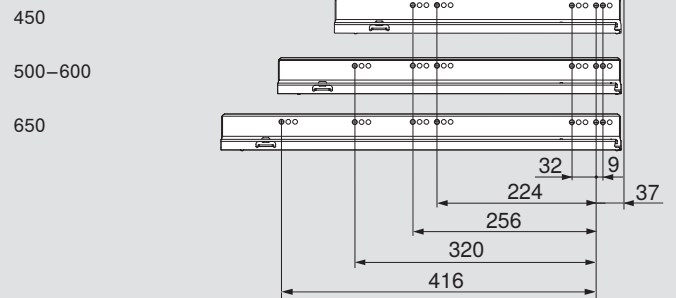


Screw position, TIP-ON BLUMOTION for inner drawers and inner pull-outs

Variant 1

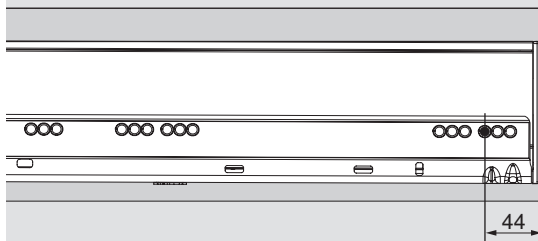

Variant 2

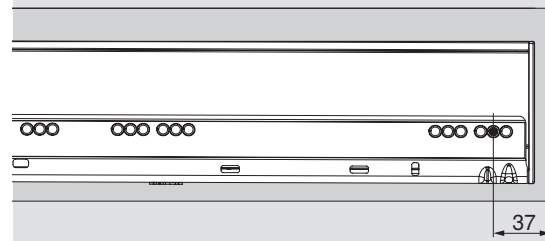


TIP-ON BLUMOTION for LEGRABOX


 **blum**

Assembly


1

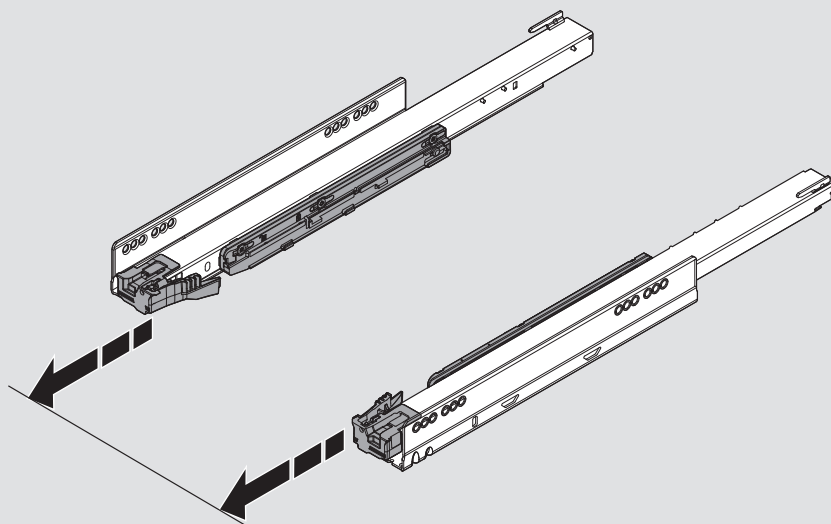

2


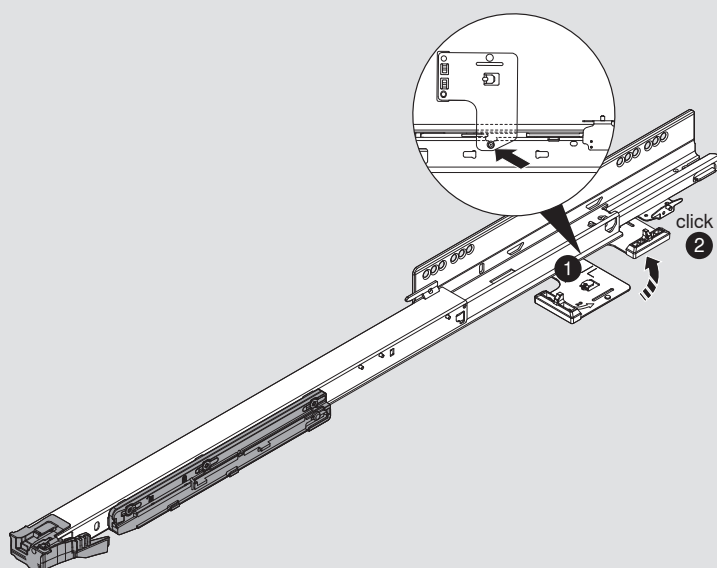


3




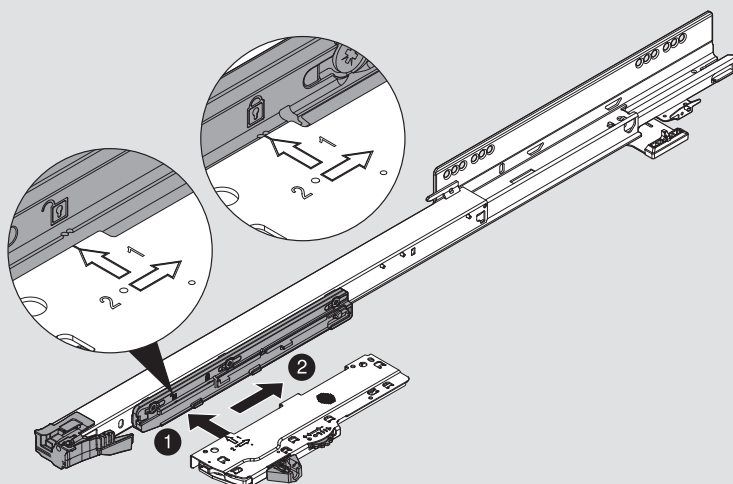


Synchronisation is required

For LW ≥ 294 mm

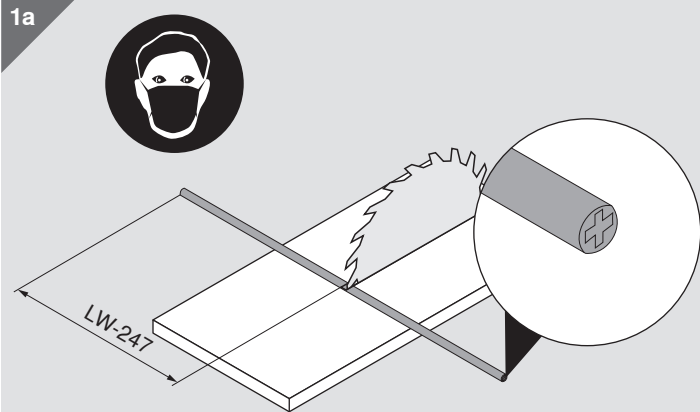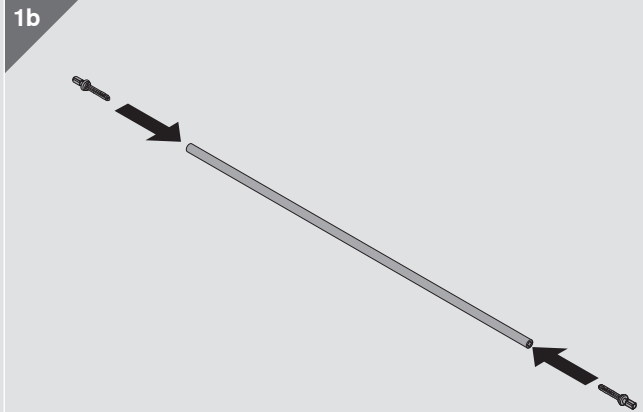

For LW 245–293 mm

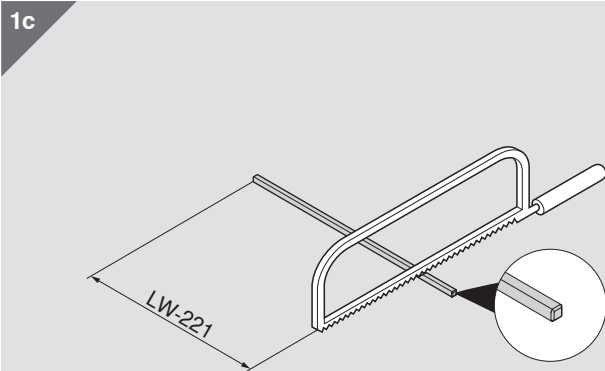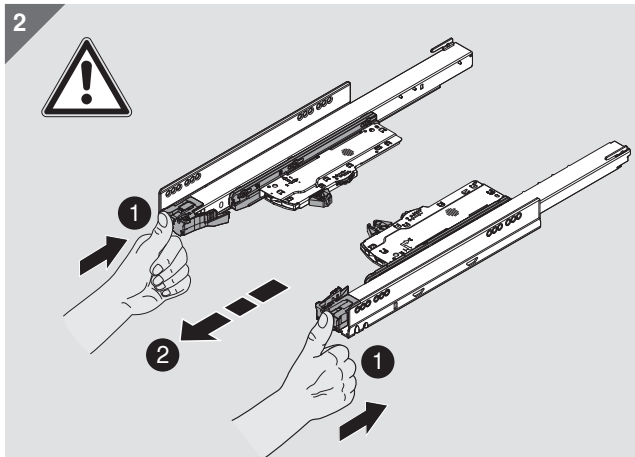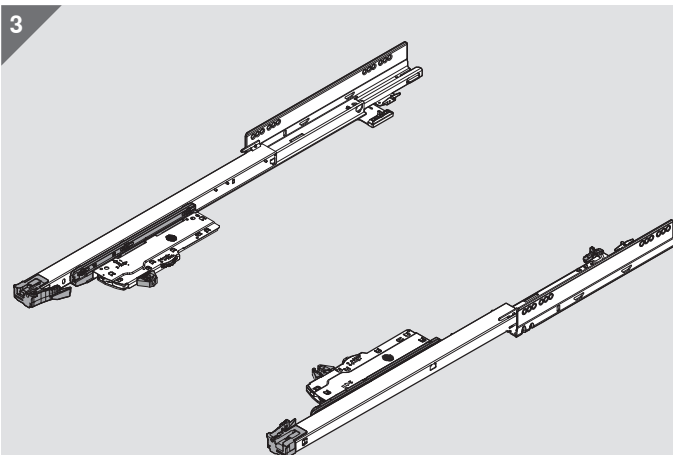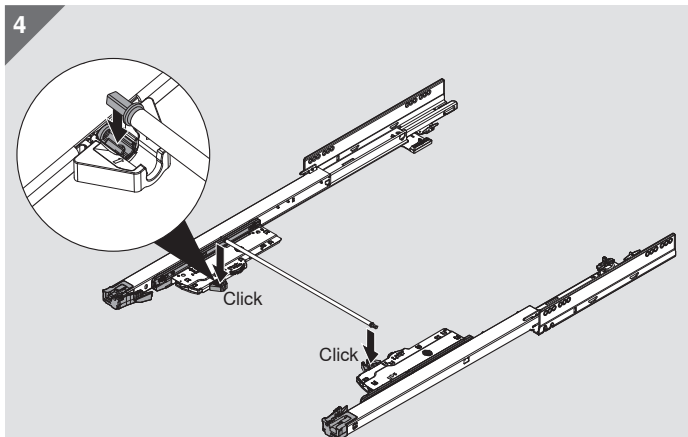




LW Internal cabinet width

TIP-ON BLUMOTION for LEGRABOX








Assembly

Depth adjustment

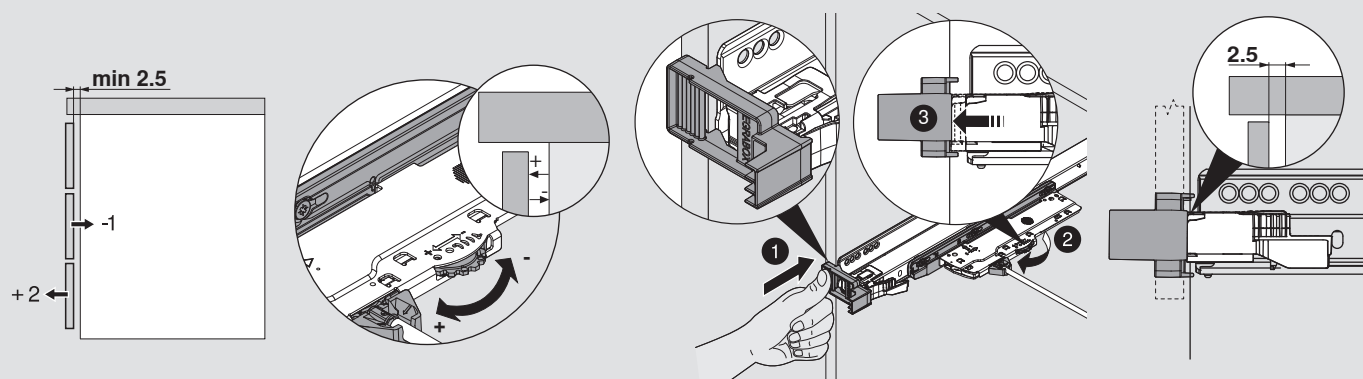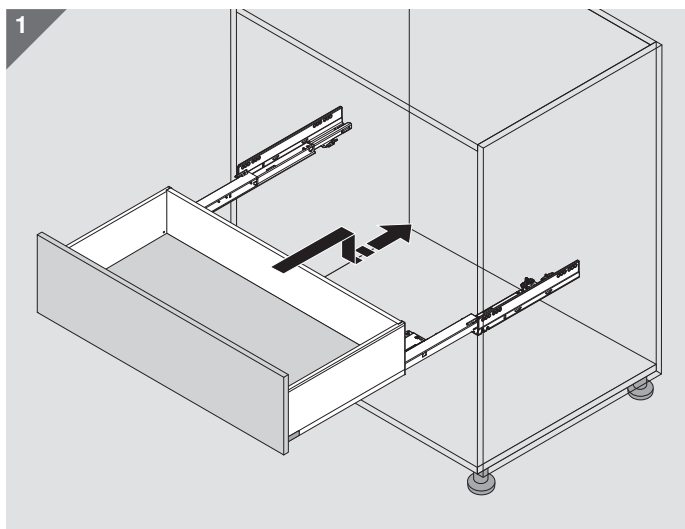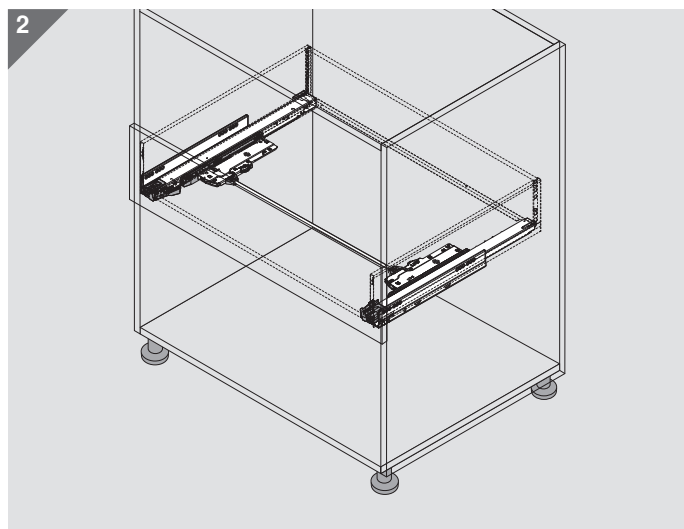

Removal

TIP-ON BLUMOTION for LEGRABOX

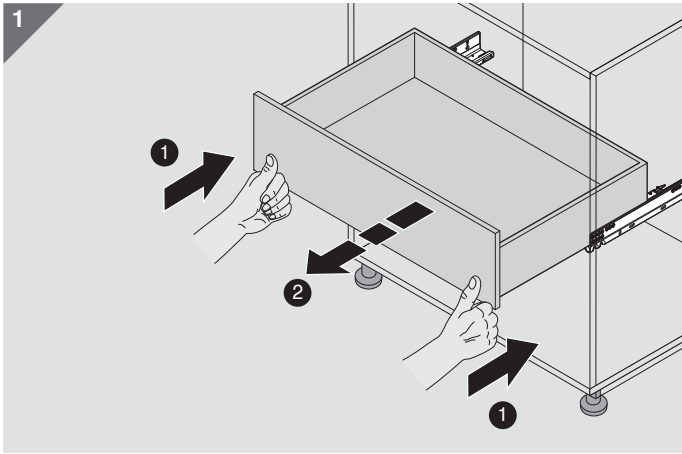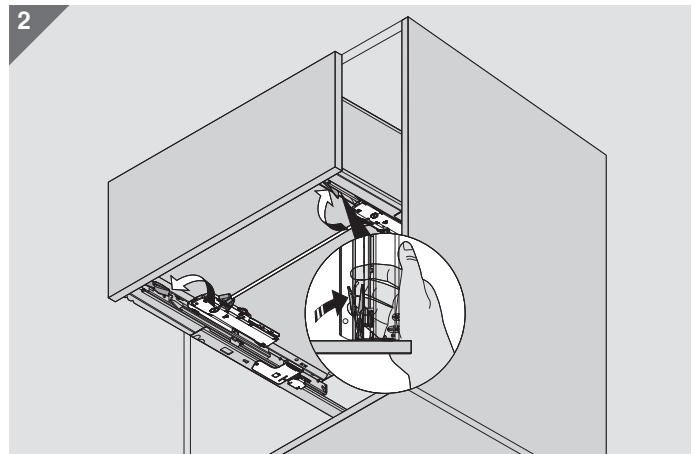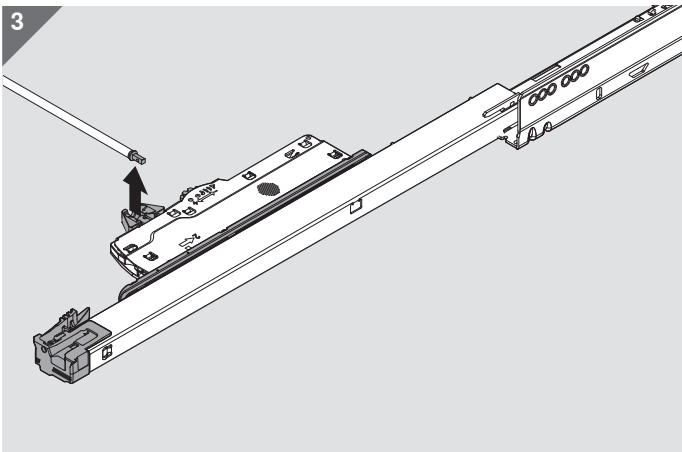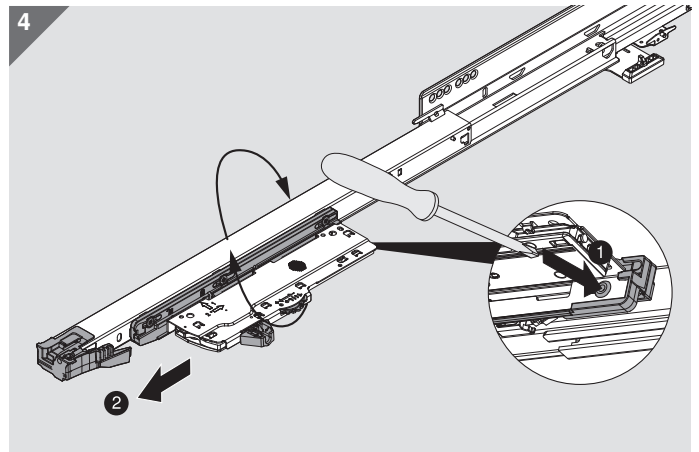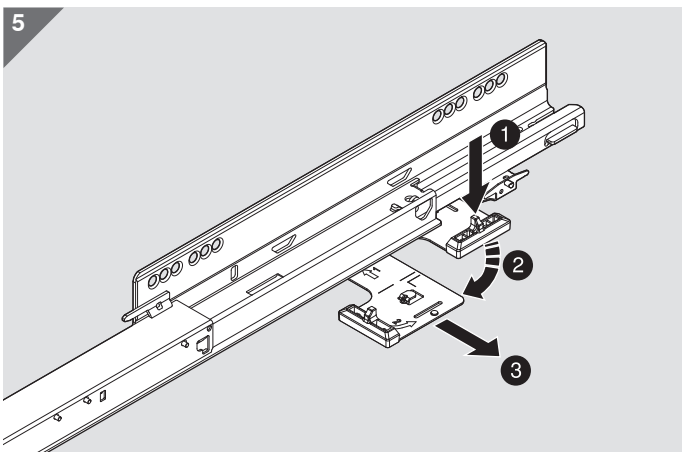




TIP-ON BLUMOTION for MOVENTO – technical overview

 **blum**

Order specification

TIP-ON BLUMOTION for MOVENTO

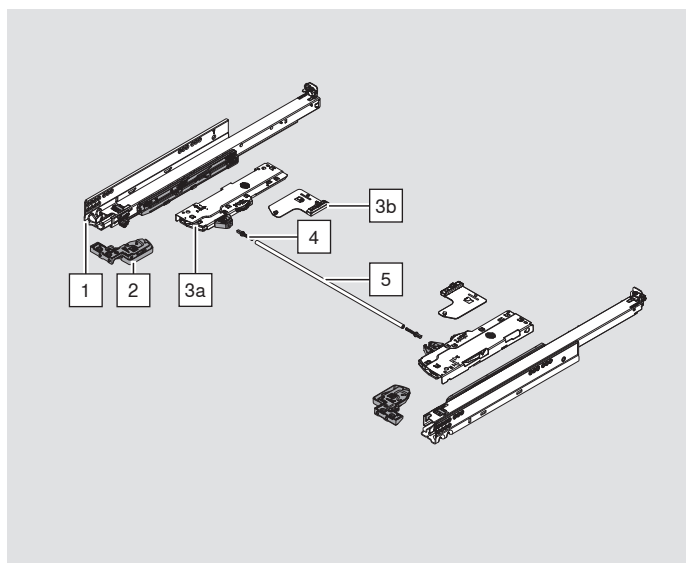

1	TIP-ON BLUMOTION runner MOVENTO left/right		
	Nominal length (NL)	40 kg	60 kg
	270 mm	760H2700M	
	300 mm	760H3000M	
	320 mm		
	350 mm	760H3500M	
	380 mm		
	400 mm	760H4000M	
	420 mm		
	450 mm	760H4500M	766H4500M
	480 mm		
	500 mm	760H5000M	766H5000M
	520 mm		
	550 mm		766H5500M
	580 mm		
	600 mm		
	650 mm		
	700 mm		
	750 mm		

2	Left/right locking device	
	Order locking device separately	
	Left	T51.7601
	Right	T51.7601

3a + 3b	Set containing TIP-ON BLUMOTION unit and TIP-ON BLUMOTION latch								
	Can be used for:			Recommended weight ranges* for an optimum opening and closing function					
	Nominal length (NL)	Unit	Part number	< 10 kg	20 kg	30 kg	40 kg	50 kg	60 kg
	270–320 mm	S0	T60L7040	≤ 10					
		S1	T60L7140		> 10–20				
	350–750 mm	L1	T60L7340	≤ 20					
		L3	T60L7540				5–40		
		L5	T60L7570				25–60		

4a	TIP-ON BLUMOTION synchronisation adapter	
	Symmetrical, in combination with synchronisation linkage, two items required per synchronisation linkage, for internal cabinet width ≥ 314 mm	
	T60.000D	

4b	TIP-ON BLUMOTION one-part synchronisation for cutting to size	
	Symmetrical, no synchronisation linkage required, for internal width of 265–313 mm	
	T60.300D	

5	TIP-ON BLUMOTION round synchronisation linkage for cutting to size	
	Possible with cabinets widths ≥ 400 mm, suitable for cabinet widths of up to 1400 mm	
	T60.1125W	

Accessories


	TIP-ON BLUMOTION front gap template	
	Setting the front gap to 2.5 mm	
	65.5631	

* Total weight of the pull-out

TIP-ON BLUMOTION for MOVENTO



Planning

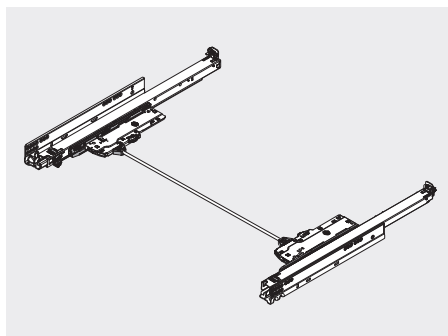

- TIP-ON BLUMOTION for MOVENTO uses the same standard installation dimensions as for MOVENTO. Please refer to the relevant product brochure or catalogue for this information
- The following planning graphics are shown as an example for a drawer




➤ More information
on MOVENTO:
[www.blum.com/
runner_movento](http://www.blum.com/runner_movento)

Front assembly – do not assemble bumpers



Bumpers should not be assembled for TIP-ON BLUMOTION!


Space requirements in the cabinet

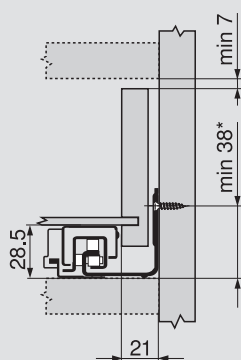

Drawer/inner drawer

SKW Internal drawer width


LW Inner cabinet width



Drawer

SKL Drawer length

NL Nominal length




Inner drawer

ISKL Inner drawer length

SKL Drawer length

NL Nominal length

X Front thickness




* + 1 mm for assembly of the cabinet profile on the horizontal cabinet side

** Limited side adjustment for a drawer side panel thickness of 16 mm, but with full tolerance utilisation of the internal width of the drawer.


Cabinet profile screw position – 40 kg

Nominal length NL (mm)

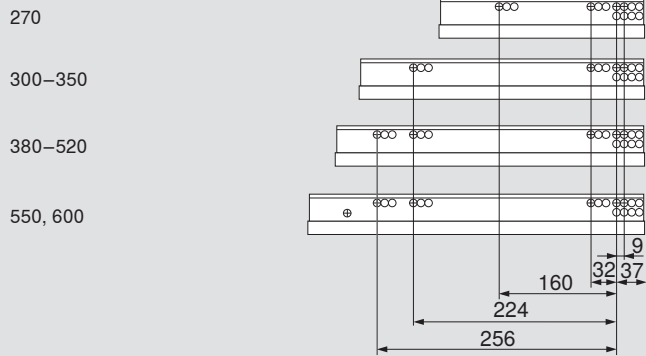


Cabinet profile screw position – 60 kg

Nominal length NL (mm)

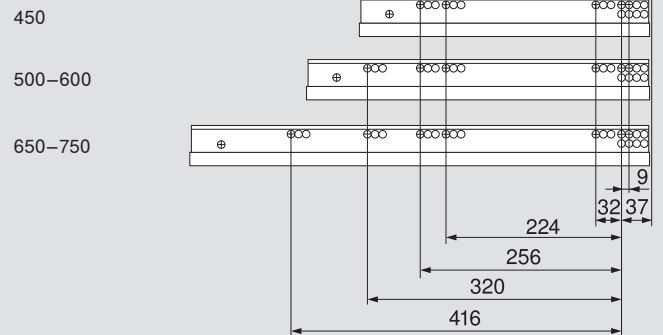

TIP-ON BLUMOTION for MOVENTO drawer assembly

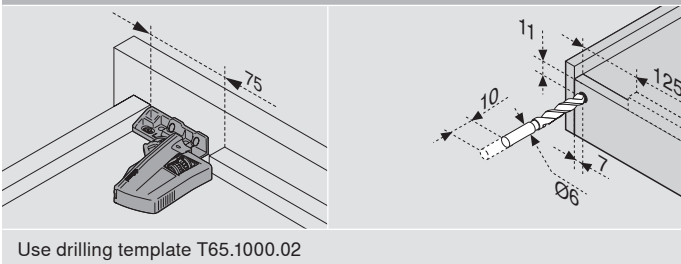


Use drilling template T65.1000.02

TIP-ON BLUMOTION for MOVENTO


 **blum**

Assembly


1

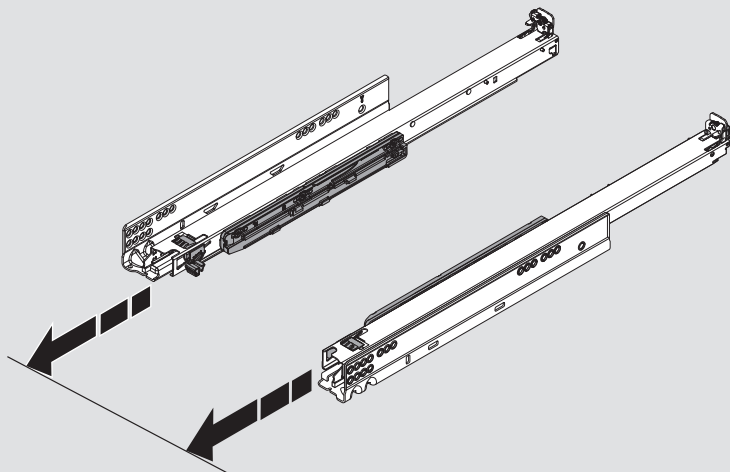

2


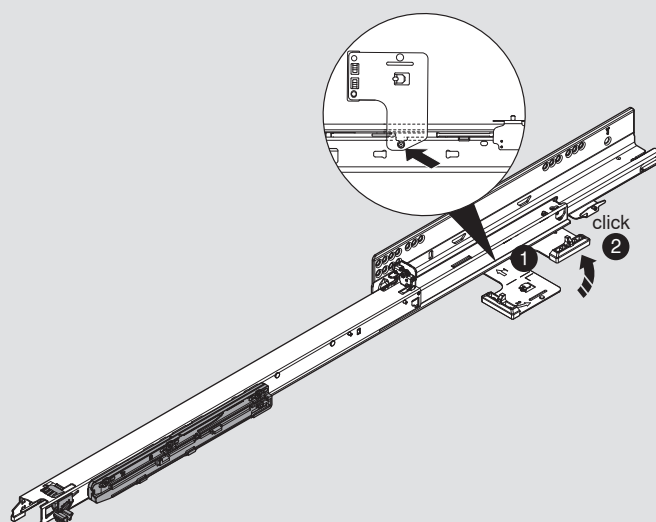


3




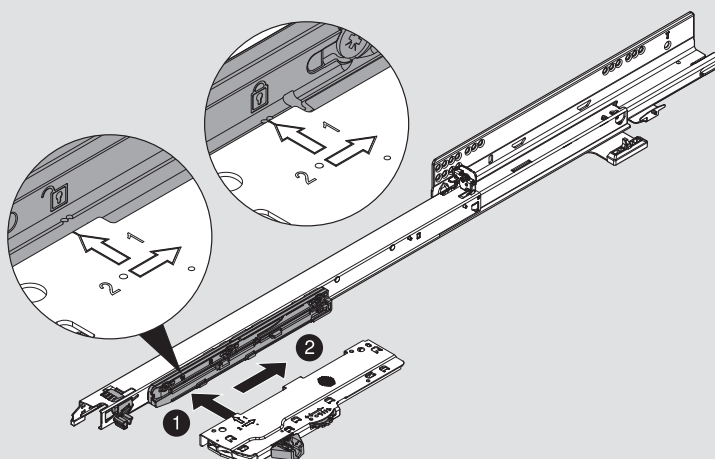


Synchronisation is required

For LW ≥ 314 mm

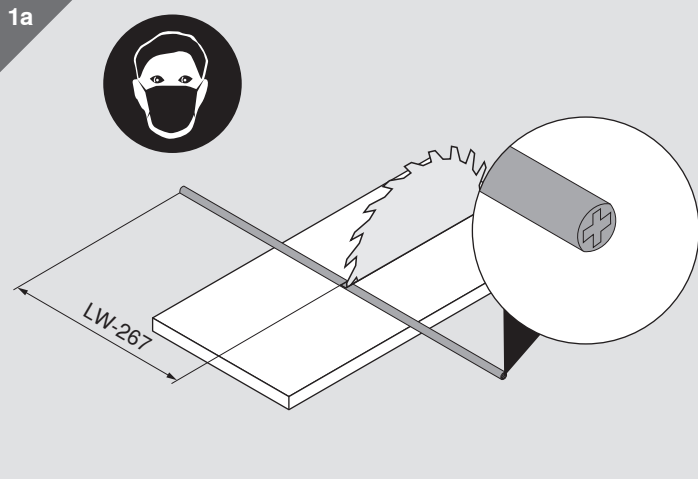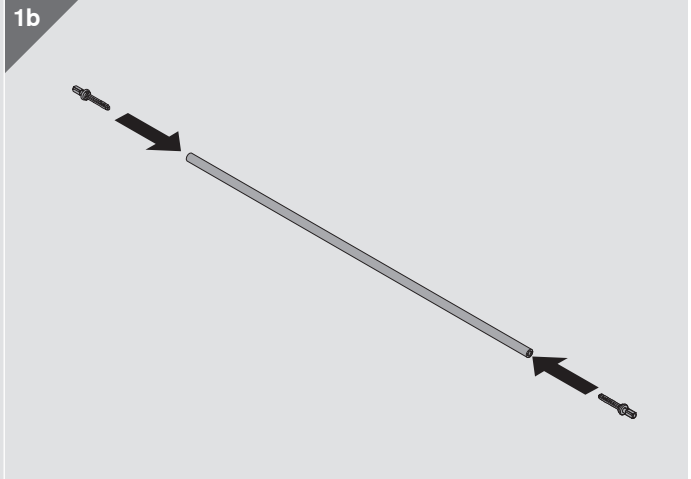

For LW 265–313 mm

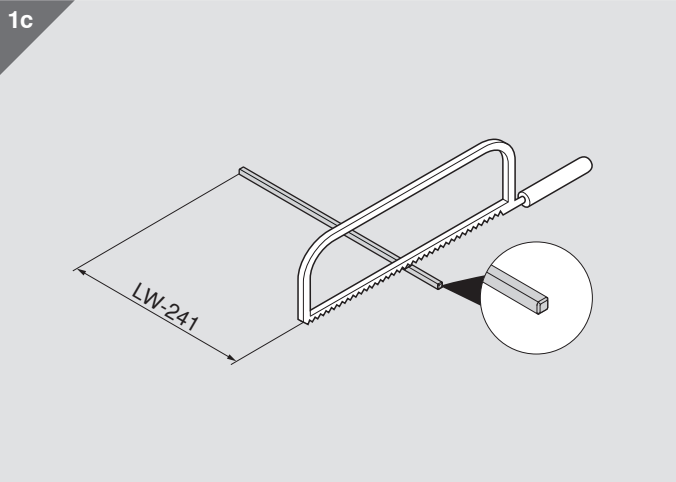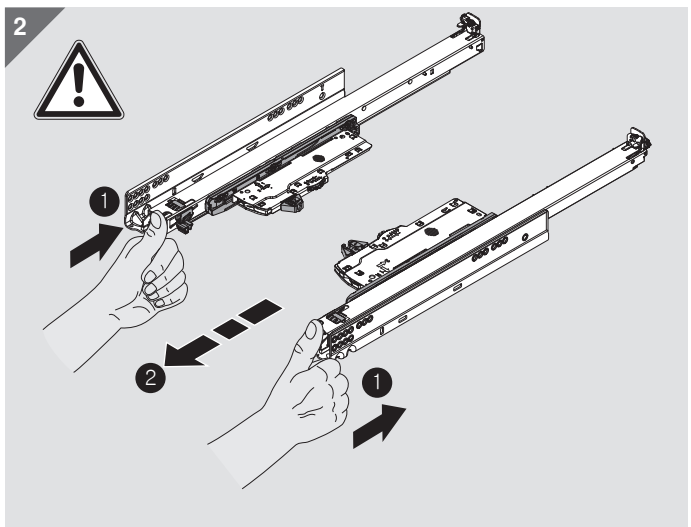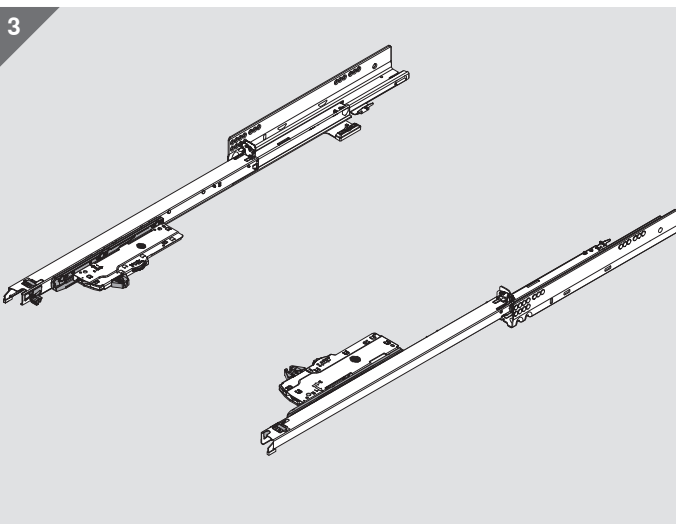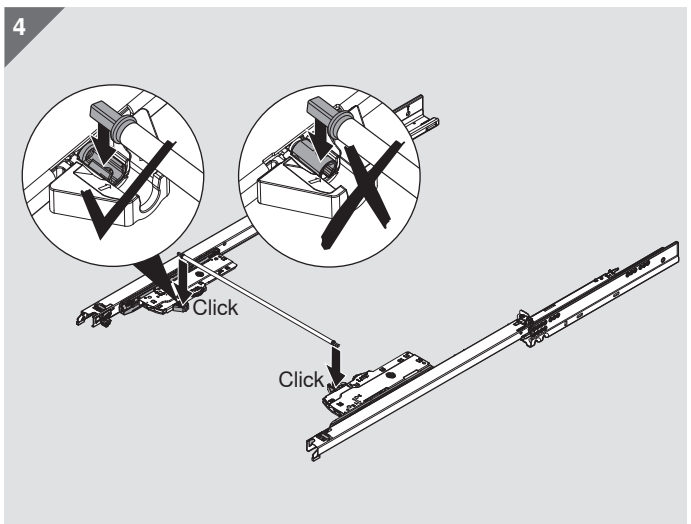




LW Internal cabinet width

TIP-ON BLUMOTION for MOVENTO








Assembly

Depth adjustment

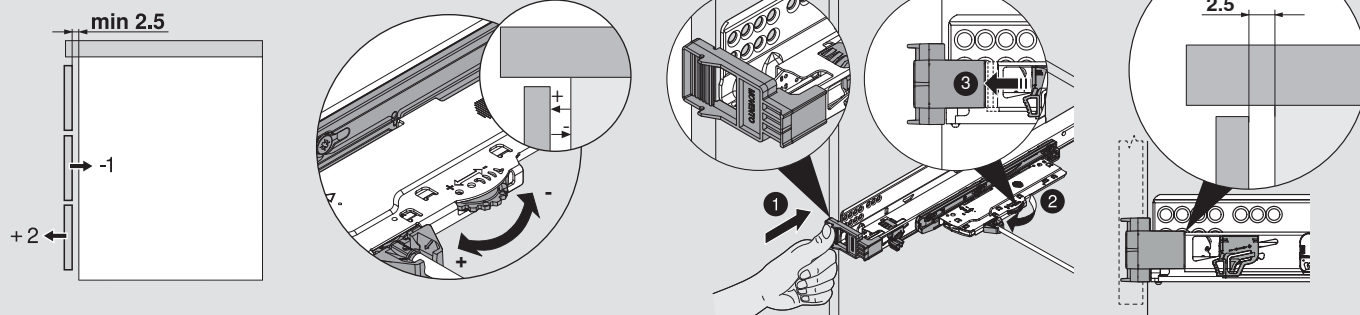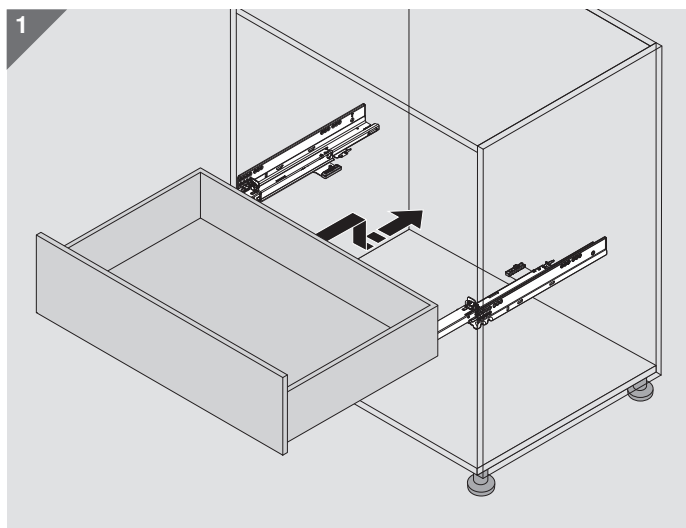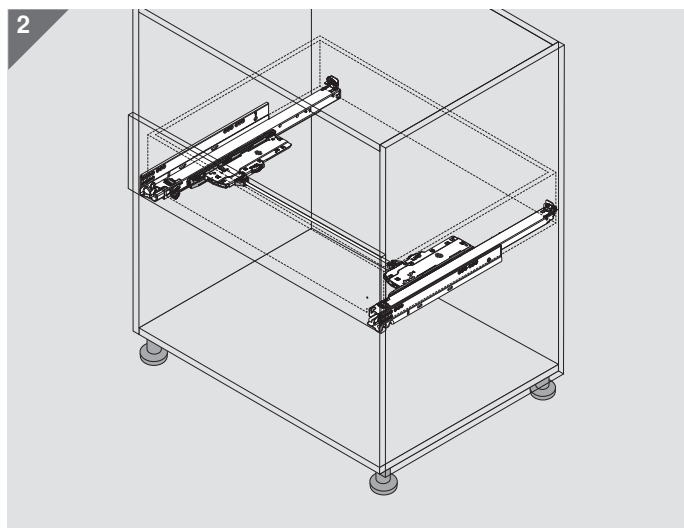

Removal

TIP-ON BLUMOTION for MOVENTO

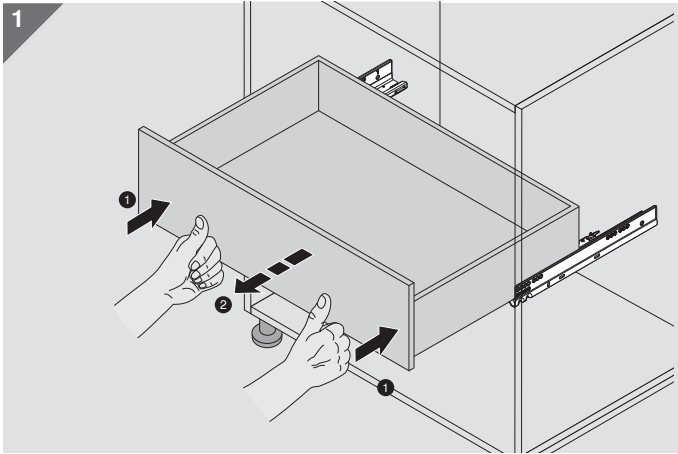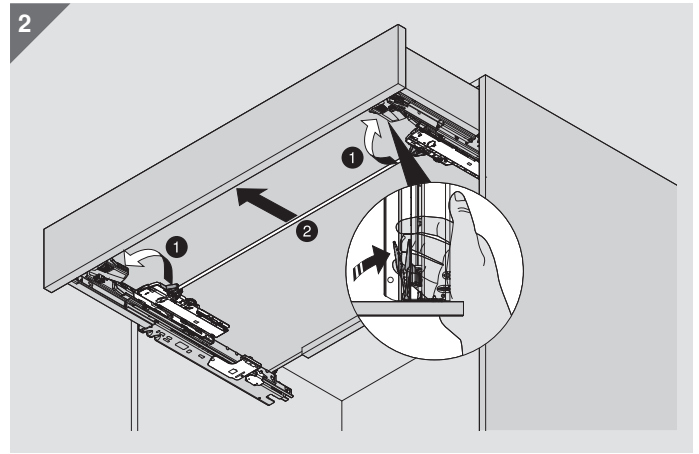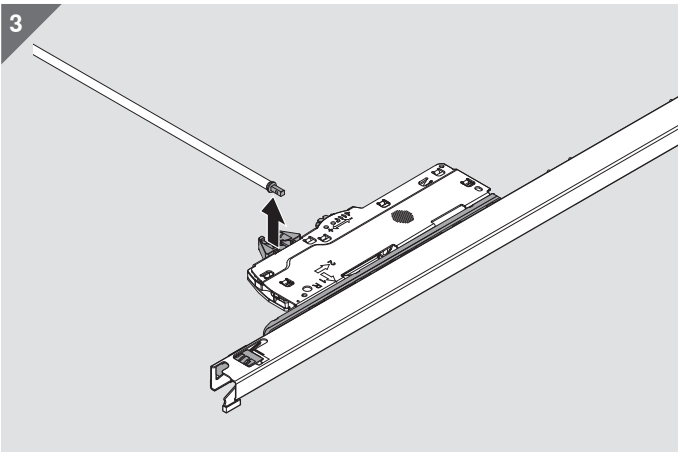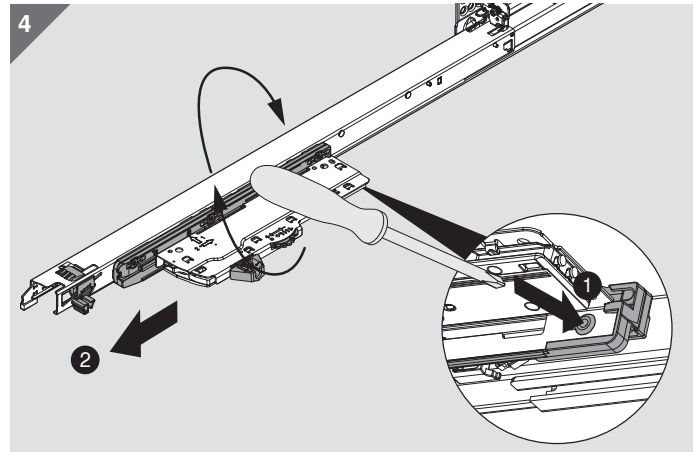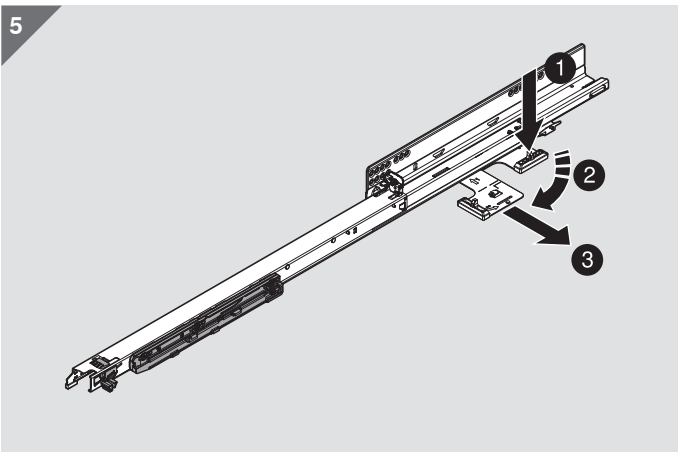

Blum U.K.
Mandeville Drive
Kingston
Milton Keynes
Buckinghamshire
MK10 0AW
Tel.: 01908 285700
Fax: 01908 285701
E-mail: info.uk@blum.com

Julius Blum GmbH
Furniture Fittings Mfg.
6973 Höchst, Austria
Tel.: +43 5578 705-0
Fax: +43 5578 705-44
E-mail: info@blum.com
www.blum.com



ISO 9001
Certified Quality
System



ISO 14001
Certified Environmental
System



ISO 50001
Certified Energy
System

