Application

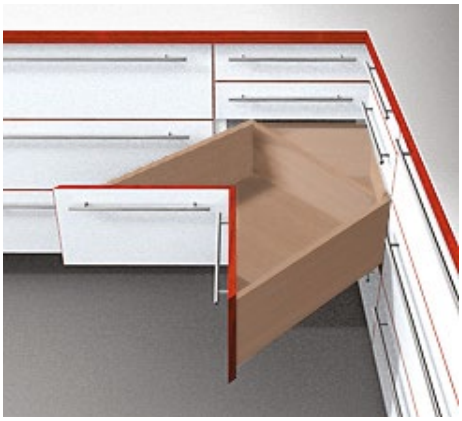

Description

- Use longer length heavy duty MOVENTO runners
- Requires special cabinet and drawer construction (see note below)
- For **16** (5/8") maximum drawer side material
- **170 lb static load capacity**

Basic Components

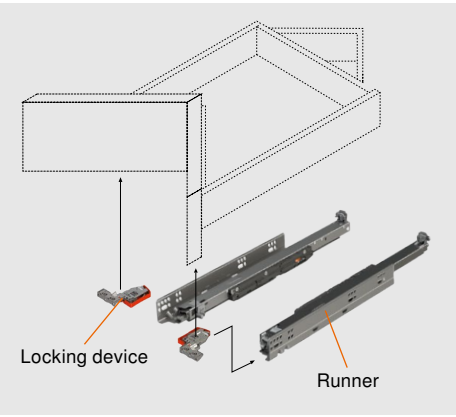

Components

Runner set

One set required per drawer

Sample SPACE CORNER drawer plans are available for download at blum.com

Corner cabinet size	Maximum **16** (5/8") drawer side thickness
33", 36", 39" or 42"	**769.6860S**
Wood screw for installation	**606N or 606P**
System screw for installation	**662.1150.HG**

NOTE: SPACE CORNER requires special cabinet and drawer construction. See suggestions on drawer construction at blum.com.

Standard locking device with side-to-side adjustment

- One right and one left required per drawer
- Captive right and self-aligning left device
- Self-adjusting drawer length tolerance
- Steel base with synthetic, spring-loaded release levers
- Minimum inside drawer width **170** (6-11/16")
- Side-to-side adjustment **±1.5** (1/16")
- For use with MOVENTO runners only

	Part no.
Right locking device	**T51.7601 R**
Left locking device	**T51.7601 L**
Installation screw	**606N or 606P**

Measuring corner cabinet size

Top view

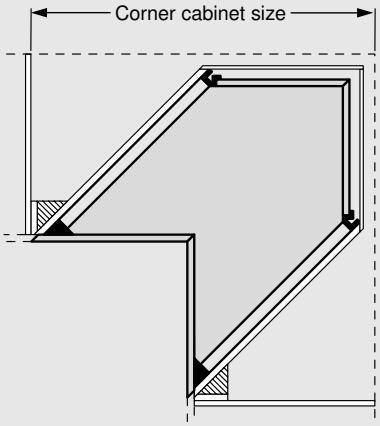

 © 2024 Blum, Inc.

For a 39" SPACE CORNER using 5/8" material and 769.6860S

Top view

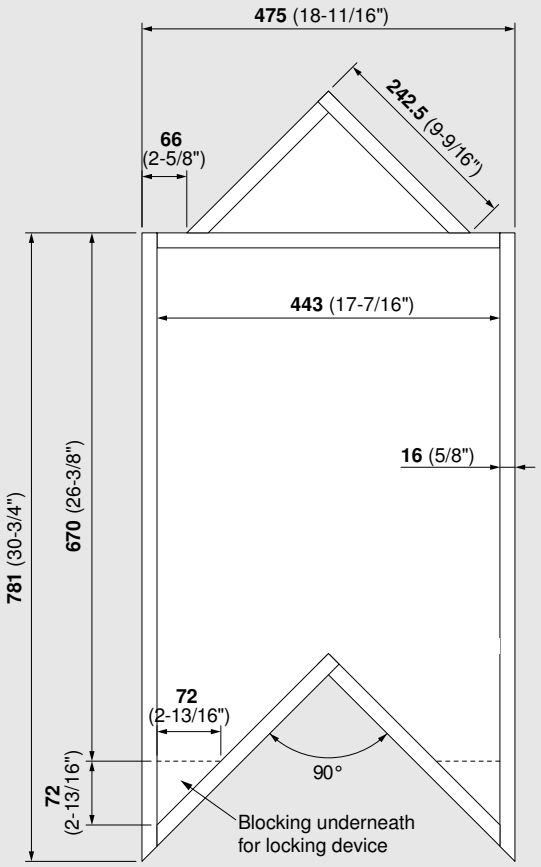

Mounting locations

Side view

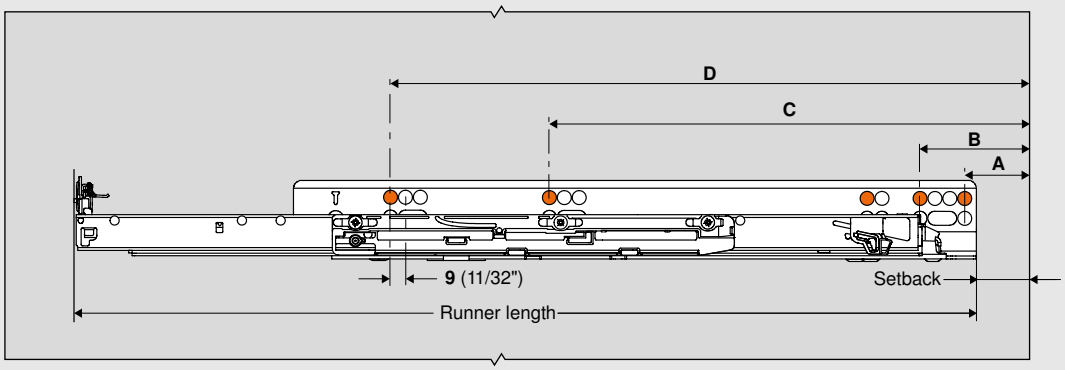

NOTE: Detailed drawings for drawer construction are available at blum.com

MOVENTO	Drawer material	Setback	A	B	C	D
769.6860S	**16** (5/8")	**103** (4-1/16")	**110** (4-5/16")	**137** (5-3/8")	**361** (14-3/16")	**489** (19-1/4")

 © 2024 Blum, Inc.